

Tuscan Coast

Engineered Vinyl Planks

www.tuscancoastvinyl.com

33.46 sq ft per box

20 mil wear layer


box weight: 50 lbs

pallet weight: 1,900 lbs

6.3 mm

7" wide planks

Tuscan Coast

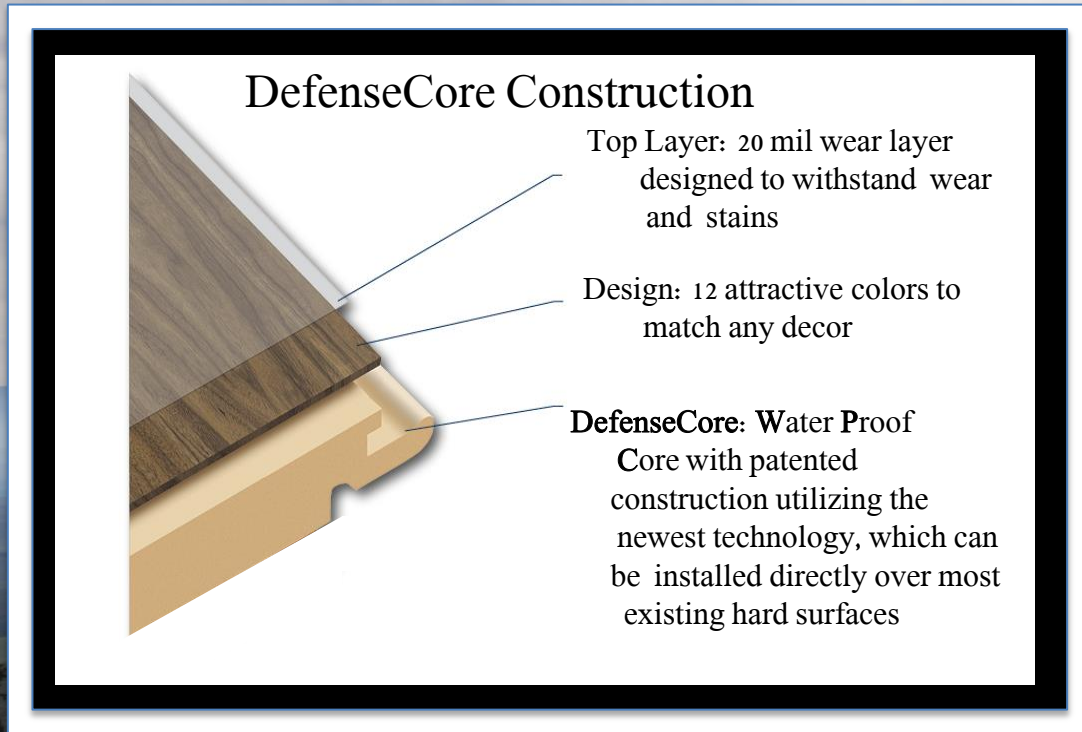

Color Line



Orvieto



Capri



Amalfi Coast



Paloma



Milan



Verona



Venice



Rome



Lucca



Naples



Pisa



Florence

Matching Trim




Orvieto
WPSNTCOV
WPTMTCOV
WPRDTCOV



Capri
WPSNTCCR
WPTMTCCR
WPRDTCCR



Amalfi Coast
WPSNTCAC
WPTMTCAC
WPRDTCAC



Paloma
WPSNTCPL
WPTMTCPL
WPRDTCPL



Milan
WPSNTCML
WPTMTCML
WPRDTCML



Verona
WPSNTCVR
WPTMTCVR
WPRDTCVR



Venice
WPSNTCVN
WPTMTCVN
WPRDTCVN



Rome
WPSNTCRM
WPTMTCRM
WPRDTCRM



Lucca
WPSNTCLC
WPTMTCLC
WPRDTCLC




Naples
WPSNTCNP
WPTMTCNP
WPRDTCNP




Pisa
WPSNTCPS
WPTMTCPS
WPRDTCPS




Florence
WPSNTCFL
WPTMTCFL
WPRDTCFL

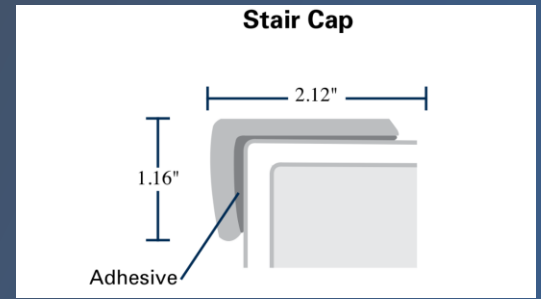

Stair nose
WPSNTC color
abbreviation

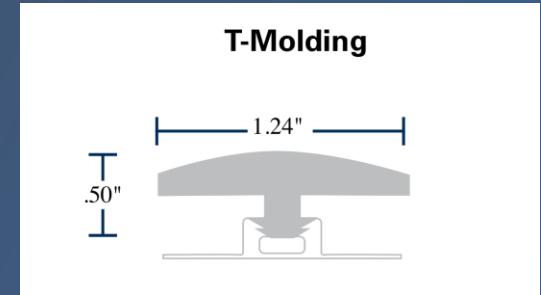

T-Mold
WPTMTC color
abbreviation

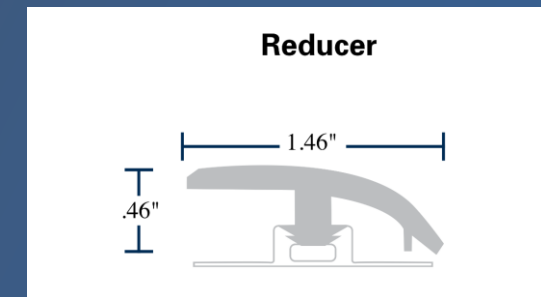

Reducer
WPRDTC color
abbreviation

Display Aesthetics

The display rack has 12 slots housing the 21" x 36" samples to show off the wide planks and the detail of the boards. The samples include a large label on the back with a small (2x4) spec label for the front. The handle is on the side. Handboards are also available with 6 colors on each side which are 27" x 20".

Double-sided handboard



Full Display

Architect Folders

Tuscan Coast Engineered Vinyl Planks



Excellent Sound Reduction
IIC 59 DB STC 61 DB
100% Waterproof
No Recycled Fillers

www.tuscancoastvinyl.com

Dimensions	7" X 48"	Commercial Warranty	10 year
Thickness	6.35 mm	Residential Warranty	Lifetime
Wear Layer	20 mil	Moisture Warranty	Lifetime
Sq. Ft. / box	33.46	Structure Warranty	Lifetime

Test Data

ASTM-E648 Critical Radiant Flux: Meets or exceeds, Class 1
ASTM E492-09 Impact Sound Conduction: IIC 59 db
ASTM E990-09 Airborne Sound Conduction: STC 61 db
ASTM C818 Thermal Resistance: R Value - 0.57
NALFA 3.2 Thickness Swell: Class 4, Heavy Commercial
NALFA 3.3 Xenon Light Resistance: Class 4, Heavy Commercial
NALFA 3.4 Cleanability-Stain Resistance: Class 4, Heavy Commercial
NALFA 3.5 Large Ball Impact Resistance: Class 4, Heavy Commercial
NALFA 3.6 Small Ball Impact Resistance: Class 4, Heavy Commercial
NALFA 3.8 Dimensional Tolerance: Class 4, Heavy Commercial
NALFA 3.9 Caster Chair: Class 3, Commercial
NALFA 3.10 Surface Bonding: 1.31 N/mm - Exceeds Class 3
Commercial Requirement
ASTM C 1028-96 Static Coefficient of Friction: 0.68 (slip resistance)
Passes ADA/OSHA standard



ASTM F-970-07 Static Load Limits: 0.004 inch - Passes at 250 psi
ASTM-F2753 Rolling Load Over Resilient FC: 0.024 inch
ASTM F 1514 Color Resistance to Heat: Meets ≤ 0.6 Delta E Requirement
ASTM F 1515 Color Resistance to Light: Meets ≤ 0.6 Delta E Requirement

DefenseCore Specifications

Construction	Engineered Vinyl Composite
Installation Method	Glueless Floating
Finish	UV Cured
Installation Grade	Above, on and below
Subfloor Preparations	Minimal
Edge Profile	4-sided bevel
Gloss Level	8%-10%
Matching Trim	Yes
Locking System	Unilin Angle/Zip Method

Distributed By



Designed not to telegraph
subfloor imperfections

Certifications: Carb Compliant, Contributes to LEED Credits, California 01350 Compliant, GREENGUARD GOLD Certified, Phthalates Free

Environmental Statement: We are committed to providing consumers and specifiers with beautiful and durable floors at a good value, while minimizing our impact on the environment and enhancing and improving whenever possible



SKU: WP 710 AC Color: Amalfi Coast



SKU: WP 711 VR Color: Verona



SKU: WP 712 OV Color: Orvieto



SKU: WP 701 NP Color: Naples



SKU: WP 702 ML Color: Milan



SKU: WP 703 RM Color: Rome



SKU: WP 704 FL Color: Florence



SKU: WP 705 VN Color: Venice



SKU: WP 706 CR Color: Capri



SKU: WP 707 PS Color: Pisa



SKU: WP 708 PL Color: Paloma



SKU: WP 709 LC Color: Lucca

Tuscan Coast


DefenseCore Specifications

Dimensions	7" X 48"
Thickness	6.35 mm
Wear Layer	20 mil
Sq. Ft. / box	33.46
Box weight	50 lbs
Commercial Warranty	10 year
Residential Warranty	Lifetime
Moisture Warranty	Lifetime
Structure Warranty	Lifetime
Construction	Engineered Vinyl Composite
Installation Method	Glueless Floating
Finish	UV Cured
Installation Grade	Above, on and below
Subfloor Preparations	Minimal
Edge Profile	4-sided bevel

Engineered Vinyl Planks

- Tuscan Coast provides an elegant and durable floor with a responsible ecological footprint suitable for residential and commercial projects
- Easy Installation: Minimal prep work and DefenseCore is designed not to telegraph imperfections in the subfloor
- This patented product boasts a certification from GREENGUARD and contributes to LEED credits

DefenseCore Construction

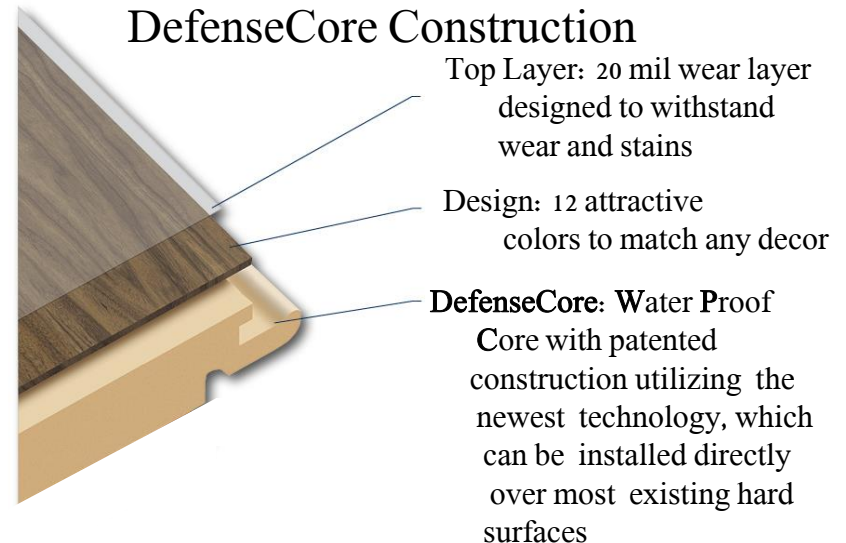

TEST DATA

ASTM-E648 Critical Radiant Flux: Meets or exceeds, Class 1

ASTM E492-09 Impact Sound Conduction: IIC 62 db

ASTM E90-09 Airborne Sound Conduction: STC 62 db

ASTM C518 Thermal Resistance: R Value – 0.57

NALFA 3.2 Thickness Swell: Class 4, Heavy Commercial

NALFA 3.3 Xenon Light Resistance: Class 4, Heavy Commercial

NALFA 3.4 Cleanability-Stain Resistance: Class 4, Heavy Commercial

NALFA 3.5 Large Ball Impact Resistance: Class 4, Heavy Commercial

NALFA 3.6 Small Ball Impact Resistance: Class 4, Heavy Commercial

NALFA 3.8 Dimensional Tolerance: Class 4, Heavy Commercial

NALFA 3.9 Caster Chair: Class 3, Commercial

NALFA 3.10 Surface Bonding: 1.31 N/mm – Exceeds Class 3 Commercial Requirement

ASTM C 1028-96 Static Coefficient of Friction: 0.68 (slip resistance) Passes ADA/OSHA standard

ASTM F-970-07 Static Load Limit: 0.004 inch – Passes at 250 psi

ASTM-F2753 Rolling Load Over Resilient FC: 0.024 inch

ASTM F 1514 Color Resistance to Heat: Meets <8.0 Delta E Requirement

ASTM F 1515 Color Resistance to Light: Meets <8.0 Delta E Requirement

FloorSource Advantage


- US based back up inventory of engineered vinyl along with underlayment, solid and engineered hardwoods
- US based territory managers
- US based customer and claims service
- Floor Source will be listed as the importer of record



Building On A Sound Foundation

Tuscan Coast Engineered Vinyl Planks Order Form

Don't forget **The Defender**, the official Tuscan Coast underlayment, to complete your order!

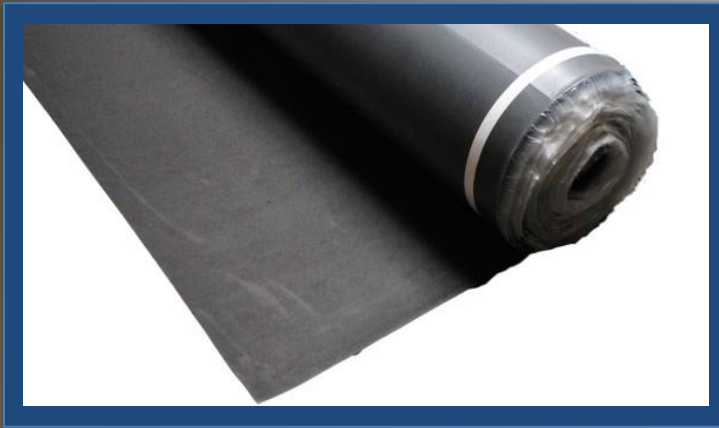

- Roll Size: 100 sq ft
- Thickness: 3 mil
- Color: Black
- Width: 48"
- Weight per roll: 10 lbs
- Materials: Neoprene Foam, Film, Tape
- STC 54
- IIC 59
- Moisture barrier
- Resistant to the growth of bacteria, mildew and mold
- Sound control
- Installs over subfloors including cement and plywood

Customer Name/ Number: _____ Date: _____
 Purchase Order #: _____
 Contact: _____
 Ship Date: _____
 Phone Number: _____

PRODUCT NAME		# OF CARTONS	35 BOXES/ PALLET	PRICE
Engineered Vinyl				
Naples	WP 701 NP			
Milan	WP 702 ML			
Rome	WP 703 RM			
Florence	WP 704 FL			
Venice	WP 705 VN			
Capri	WP 706 CR			
Pisa	WP 707 PS			
Paloma	WP 708 PL			
Lucca	WP 709 LC			
Amalfi Coast	WP 710 AC			
Verona	WP 711 VR			
Orvieto	WP 712 OV			
Samples				
Display Rack	TCKRACK			
Display Samples	TCDISPLAYBDS			
Handboards	TCHANDBOARD			
Underlayment				
Shield 3 -1	ULSHIELD			
Defender	ULDEFEND			

Shipping Information

Address: _____

Freight Preferences